

CHEVRON BELTS

Troughability and Toughability

We are the global market leader in the production of highly customised Endless conveyor belts for the mobile crushing, screening and recycling sectors.

Smiley Monroe's multi-ply Chevron belts are designed for space-saving, inclined conveying, where they deliver increased capacity when carrying bulk materials, such as crushed rock, recycling and demolition materials, sand and wood chip.

Get in touch with our team to help you select the right Chevron belt for your application.



WHY CHEVRON BELTS?

- ✓ Manufactured to DIN 22102 Standard - rigorously tested in our fully equipped in-house Belt Testing Lab
- ✓ Excellent cut, impact and wear resistant covers with great troughability
- ✓ Available in ToughFlex®, Fabric Breaker and Ripstop for your toughest conveying applications
- ✓ Wide range of chevron belt patterns and cleat heights available
- ✓ Hot spliced (vulcanised) Endless belts are V - Spliced as standard
- ✓ Can be supplied as rolls, Endless belts, Prepared belts (Ready to splice), Cut length belts (Ready to prepare) and Zip Clip® replacement belts

APPLICATIONS

- Crushing, Screening & Recycling
- Demolition
- Environmental
- Washing
- Quarrying
- Sand & Gravel
- Bulk Material Handling
- Road Construction

V1 09/18

Head Office & Production Centre
Smiley Monroe Ltd
23 Ferguson Drive
Knockmore Hill Industrial Park
Lisburn, BT28 2EX
Northern Ireland, United Kingdom

T. +44 (0) 28 9267 3777
E. hello@smileymonroe.com

SMILEY[®]
MONROE

CHEVRON BELTS

Troughability and Toughability

CHEVRON PROFILE EXAMPLES

In addition to our popular 15mm and 25mm height cleated chevron belts, with a V-splice as standard, we are accomplished in producing a wide range of patterns and cleats. Our setup enables us to use both hot and cold vulcanisation techniques, to suit your requirements.

Here are a few examples of our standard stock chevron designs:



| Profile | Belt Width (mm) | Cleat Width (mm) | Cleat Pitch (mm) | Cleat Height (mm) |
|-----------------|-------------------|------------------|------------------|-------------------|
| V6 | 830, 1200 & 1500 | 830, 1200 & 1500 | 75 | 6 |
| C15P385 | 450 - 800 | 400 | 250 | 15 |
| C25P1000 | 1400, 1500 & 1600 | 1000 | 400 | 25 |
| Y32P460 | 650 | 450 | 255 | 32 |


V6



C15P385



C25P1000

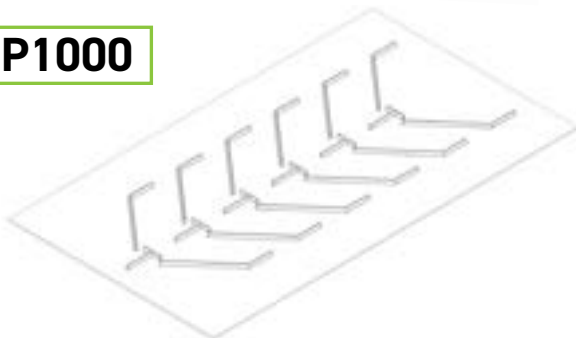

Y32P460



Head Office & Production Centre
Smiley Monroe Ltd
23 Ferguson Drive
Knockmore Hill Industrial Park
Lisburn, BT28 2EX
Northern Ireland, United Kingdom

T. +44 (0) 28 9267 3777
E. hello@smileymonroe.com

SMILEY[®]
MONROE